



AN2405-Ceramic Antenna

Application : 169MHz Wireless communication

Key Features

- 24.0mm(L) × 5.0mm(W) × 3 mm(H)
- Omni-directional in azimuth
- Lead (Pb) Free

Return Loss

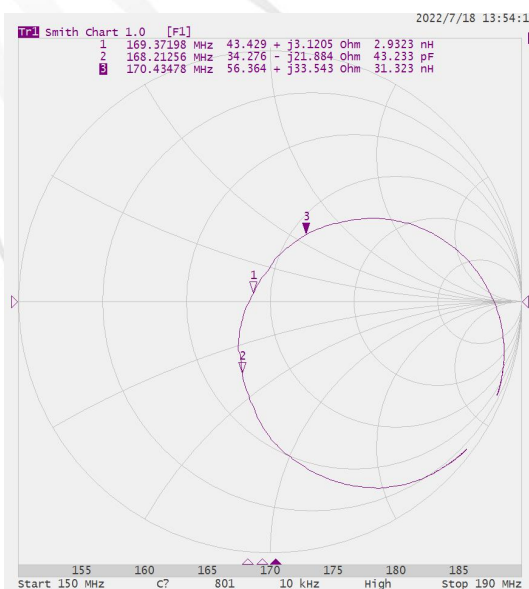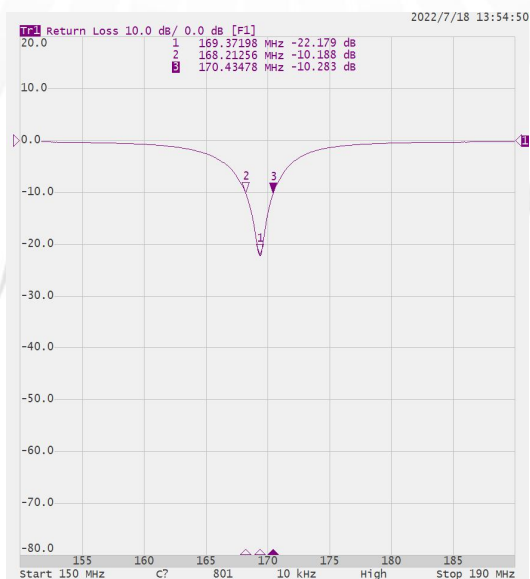

Quick Reference Data

Item	Specification
Center Frequency	169MHz
Bandwidth (typ.)	5 MHz
Peak Gain (typ.)	1 dBi
VSWR	2.0 (max)
Polarization	Linear
Pattern	Omni-directional
Impedance	50 Ω