


# PF0602-916 Multilayer Chip Antenna

**Application : 916MHz ISM Band**


## Key Features

- Light weight and low profile  
6.0mm(L) × 2.0mm(W) × 1.0mm(H)
- Omni-directional in azimuth
- Lead (Pb) Free

## Return Loss

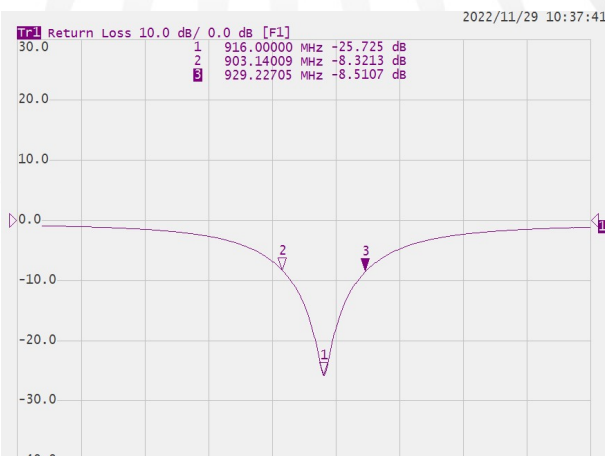

## Smith Chart

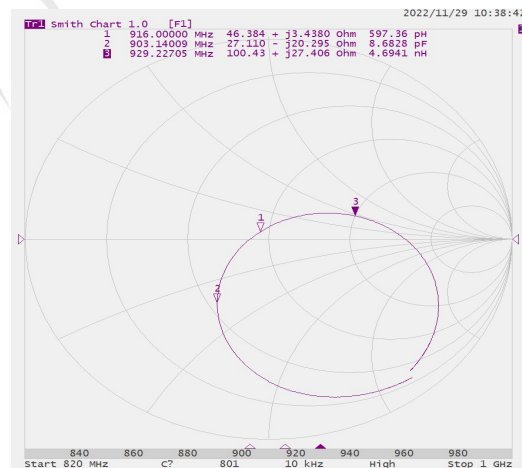

## Quick Reference Data

Item	Specification
Center Frequency	916 MHz
Bandwidth (typ.)	25 MHz
Peak Gain (typ.)	0.5 dBi
VSWR	2.0 (max)
Polarization	Linear
Pattern	Omni-directional
Impedance	50 Ω