

PF1003-U1 Ceramic Chip Antenna


Application : 802.1x / UWB Wireless communication

Key Features

- Light weight and low profile
10.0mm(L) × 3.0mm(W) × 2.6mm(H)
- Omni-directional in azimuth
- Lead (Pb) Free



Return Loss

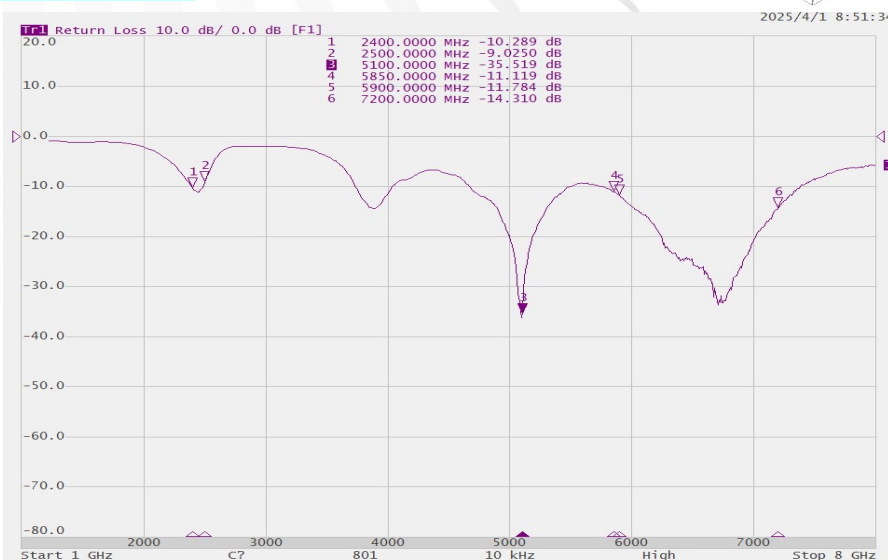

Quick Reference Data

Item	Specification
Center Frequency	2.45G / 4~7GHz
Bandwidth (typ.)	100 /3000 MHz
Peak Gain (typ.)	0.5 dBi
VSWR	2.0 (max)
Polarization	Linear
Pattern	Omni-directional
Impedance	50 Ω